


Frontal Steam Condensation Hood

GENERAL SPECIFICATIONS

- Hood controlled by the oven
- Two suction speeds depending on the opening of the door
- Easy removal of the condensation filter
- Dishwasher-safe condensation filter
- Compatible for stacked equipment
- Made of stainless steel AISI 304
- High performance motor (260W)
- It is supplied with a 1.3m cable with SCHUKO connector
- Easy interior cleaning
- Easy installation
- Condensate drainage

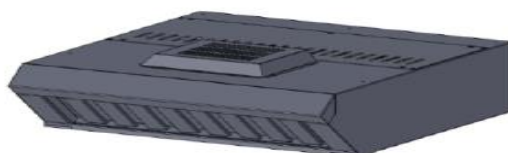


TECHNICAL SPECIFICATIONS

	Frontal steam condensation hood - chamber and door - COOK GN 1/1 MYCHA265	Frontal steam condensation hood - chamber and door - BAKE MYCHA267	Frontal steam condensation hood - chamber and door - COOK COMPACT GN 2/3 MYCHA466
Dimension A (mm)	760	760	520
Dimension B (mm)	807	882	780
Dimension C (mm)	860	935	836
Dimension D (mm)	230	230	230
Dimension E (mm)	38	38	38
Net weight (kg)	26	28	23
Electrical features	230V / 50-60Hz / 380W	230V / 50-60Hz / 380W	230V / 50-60Hz / 380W

TECHNICAL SPECIFICATIONS

	Frontal steam condensation hood - chamber and door - COOK COMPACT GN 1/1 MYCHA467	Frontal steam condensation hood - chamber and door - COOK COMPACT GN 1/1 TRANSVERSAL MYCHA468
Dimension A (mm)	520	760
Dimension B (mm)	933	730
Dimension C (mm)	990	795
Dimension D (mm)	230	230
Dimension E (mm)	38	38
Net weight (kg)	24	24
Electrical features	230V / 50-60Hz / 380W	230V / 50-60Hz / 380W

TECHNICAL DETAILS

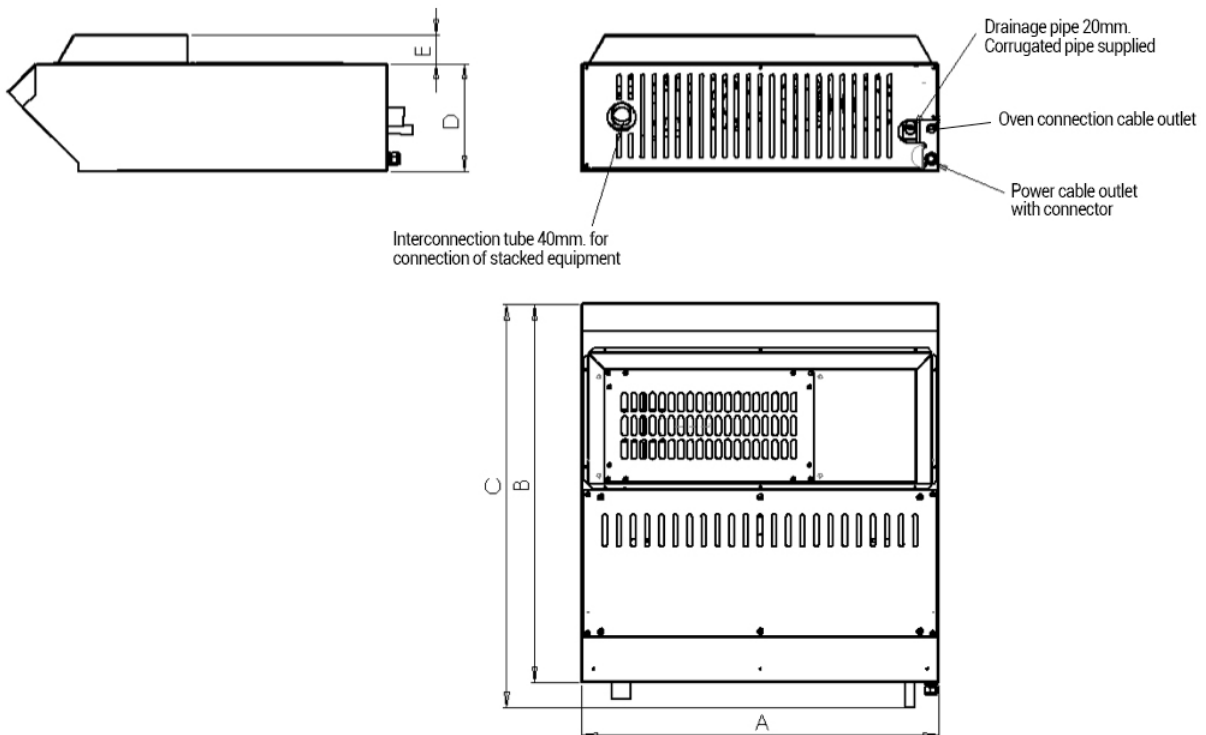

TECHNICAL DETAILS – COMPACT MODELS

