

goSensor S | M | L

TECHNICAL SPECIFICATIONS

			
	goSensor S	goSensor M	goSensor L
Exterior measurements (width x depth x height) (mm)	388 x 519 x 389	475 x 589 x 438	620 x 599 x 453
Lid	Dome	Dome	Dome
Opening system	Automatic	Automatic	Automatic
Chamber measurements (width x depth x height) (mm)	328 x 385 x 162	412 x 453 x 200	560 x 465 x 210
Vacuum pump (m ³ /h)	8 Becker/Value	16 Becker/Value	20 Becker/Value
Sealing bar position			
Approximate vacuum cycle (seconds)	40	30	35
Sealing bar length (mm)	315	405	455 + 455
Weight (kg)	36	48,5	67
Gross weight (kg)	43	62	78
Packaging dimensions (width x depth x height) (mm)	626 x 528 x 640	695 x 615 x 660	825 x 765 x 660
Power (kW)	0,73	0,85	1,2
Voltage (V/Ph/Hz)	230/L+N/50-60 (Becker) 230/L+N/50 (Value)	230/L+N/50-60 (Becker) 230/L+N/50 (Value)	230/L+N/50-60 (Becker) 230/L+N/50 (Value)
Minimum vacuum pressure (mbar)	2	2	2
Lubricating oil	ISO VG 32 food grade		

GENERAL SPECIFICATIONS

- 7-segment LED panel control
- Removable sealing bar without connections
- Soft Air. Delicate food packaging
- Stop function. Possibility to block the vacuum packer for a certain amount of time or for as long as the user wishes
- AutoClean Oil. Oil self-cleaning system
- SCS (Self Calibration System). Patented system that automatically calibrates the vacuum packaging machine
- Sensor-controlled vacuum
- Vac+. Extra vacuum for porous foods
- Liquid packaging programme
- Simple sealing (4mm)
- Equipped with interior polyethylene plate
- Made of AISI 304 18/10 stainless steel
- Well with rounded edges for easy cleaning
- Transparent methacrylate lid allows viewing the food being packed
- Side display for checking the oil level


OPTIONS

Becker or Value vacuum pump

ACCESSORIES

- Support with wheels
- Vacuum pump oil
- Vacuum bags for conservation
- Vacuum cooking bags
- Foam for core probe
- Black polyethylene food grade sheet
- Vacuum bag filling cylinder
- Accessory for liquid packaging

INSTALATION DETAILS

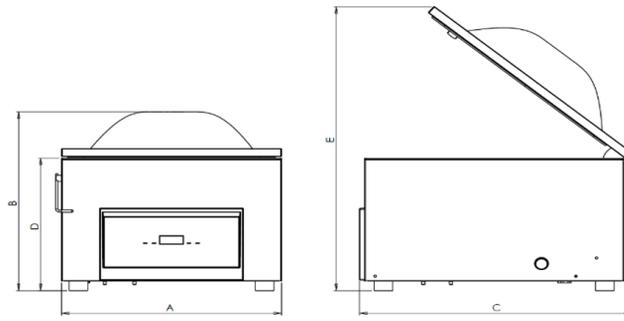

	S	M	L
Dimension A (mm)	388	475	620
Dimension B (mm)	389	438	453
Dimension C (mm)	519	589	599
Dimension D (mm)	325	325	325
Dimension E (mm)	650	695	702